

CHIP COIL



Thin Film Chip Coil **LQP10A/LQP11A** Series for High Frequency

Tight Inductance Tolerance Chip Coil for High Frequency Application Small Size and Tight Inductance Tolerance ($\pm 0.2\text{nH}$ or $\pm 2\%$)

The LQP10A/LQP11A series consists of chip coils with a tight inductance tolerance ($\pm 0.2\text{nH}$ or $\pm 2\%$) achieved even in low inductance region.

FEATURES

1. Tight inductance tolerance ($\pm 0.2\text{nH}$, $\pm 2\%$) realized by thin-film technology enables assemble with no tuning.
2. High self resonant frequency due to low stray capacitance and close inductance distribution provide stable inductance in high frequency circuit such as telecommunication equipment.
3. The external electrodes with nickel barrier structure provide excellent solder heat resistance.

● LQP10A


Ultra-Small size 0402 inductor which is low, and lightest weight (half of multilayer type) in the world enables to miniaturize mobile telephone.

● LQP11A

Small size of 0603 (LQP11A) is suitable for small hand held equipment, especially for card size equipment.


APPLICATIONS

- High frequency circuit of telecommunication equipment, such as DECT, PHS, PCS, PCN, GSM, DCS and CDMA.
- Impedance Matching—Power-AMP Module (PA), SAW filter
- Resonance circuits—VCO

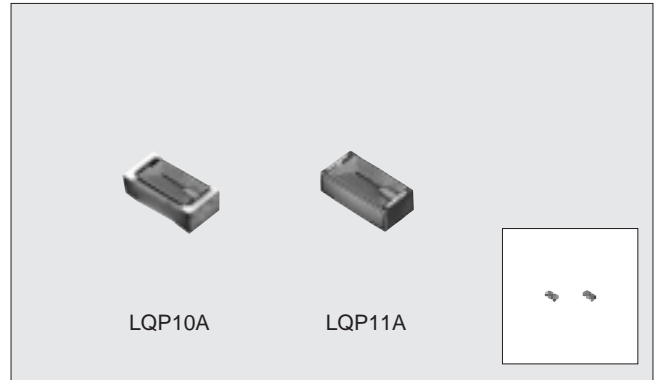

The appearance of coil pattern depends on the part number.

DIMENSIONS

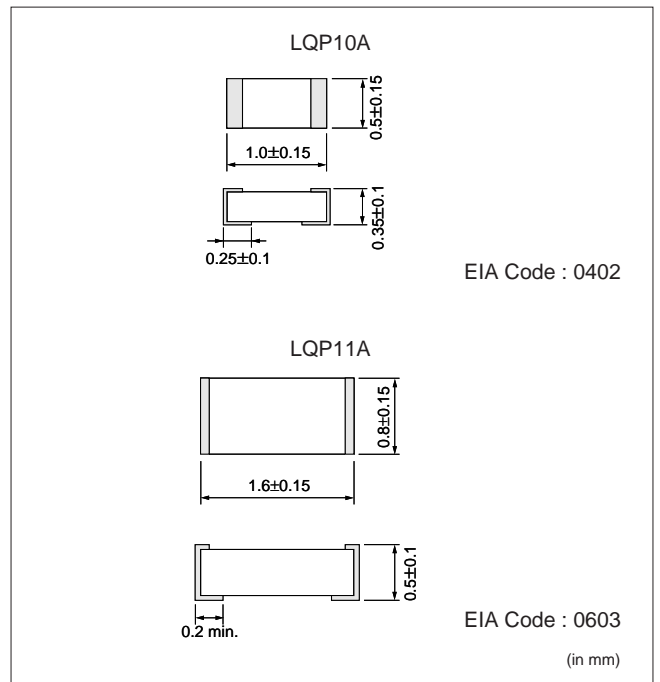

Use plastic tweezers when treating with tweezers.

■SPECIFICATIONS

LQG10A


Part Number	Inductance			Q			DC Resistance (Ω max.)	Self-resonant Frequency (MHz min)	Allowable Current (mA)	Operating Temp. Range
	Nominal Value (nH)	Tolerance	Test Frequency (MHz)	Typical @1GHz	Min. Value	Test Frequency (MHz)				
LQP10A1N0B(C)00	1.0	±0.1nH (±0.2nH)	500	50	13	500	0.1	6000	400	-40 to +85°C
LQP10A1N1B(C)00	1.1								390	
LQP10A1N2B(C)00	1.2								280	
LQP10A1N3B(C)00	1.3									
LQP10A1N5B(C)00	1.5									
LQP10A1N6B(C)00	1.6			220						
LQP10A1N8B(C)00	1.8			280						
LQP10A2N0B(C)00	2.0			40			0.3	220		
LQP10A2N2B(C)00	2.2									
LQP10A2N4B(C)00	2.4			35			0.4	190		
LQP10A2N7B(C)00	2.7									
LQP10A3N0B(C)00	3.0			30			0.5	170		
LQP10A3N3B(C)00	3.3									
LQP10A3N6B(C)00	3.6			28			0.6	160		
LQP10A3N9B(C)00	3.9									
LQP10A4N3B(C)00	4.3			29			0.7	140		
LQP10A4N7B(C)00	4.7									
LQP10A5N1B(C)00	5.1			26			0.9	130		
LQP10A5N6B(C)00	5.6									
LQP10A6N2B(C)00	6.2			25			1.1	110		
LQP10A6N8B(C)00	6.8									
LQP10A7N5B(C)00	7.5	22	1.3	100						
LQP10A8N2B(C)00	8.2									
LQP10A9N1B(C)00	9.1	21	1.6	90						
LQP10A10NG(J)00	10									
LQP10A12NG(J)00	12	20	1.8	80						
LQP10A15NG(J)00	15									
LQP10A18NG(J)00	18	70	2.0							
LQP10A22NG(J)00	22									
LQP10A27NG(J)00	27	60	2.6							
LQP10A33NG(J)00	33									

LQG11A

Part Number	Inductance			Q			DC Resistance (Ω max.)	Self-resonant Frequency (MHz min)	Allowable Current (mA)	Operating Temp. Range				
	Nominal Value (nH)	Tolerance	Test Frequency (MHz)	Peak Value (Typ.)	Min. Value	Test Frequency (MHz)								
LQP11A1N3C00	1.3	$\pm 0.2\text{nH}$	500	160	17	500	0.3	6000	300	-40 to +85°C				
LQP11A1N5C00	1.5			140			0.4							
LQP11A1N8C00	1.8			120										
LQP11A2N2C00	2.2			100			0.5		5900					
LQP11A2N7C00	2.7			90										
LQP11A3N3C00	3.3			85			0.6		4700		200			
LQP11A3N9C00	3.9			80										
LQP11A4N7C00	4.7			75			0.7	4300						
LQP11A5N6C00	5.6			65										
LQP11A6N8C00	6.8			63			0.8	3600	150					
LQP11A8N2C00	8.2			57										
LQP11A10NG00	10			$\pm 2\%$			500	55	300		300	1.0	3400	100
LQP11A12NG00	12							50				1.3		
LQP11A15NG00	15							43					1.5	2300
LQP11A18NG00	18	39	1.9		2100									
LQP11A22NG00	22	38				2.4		1900						
LQP11A27NG00	27	32	2.8		1700									
LQP11A33NG00	33	30				1400								
LQP11A39NG00	39	28	2.2		1200			50						
LQP11A47NG00	47	26												
LQP11A56NG00	56	28	3.4		1000									
LQP11A68NG00	68	27				3.5		900						
LQP11A82NG00	82	25	4.6		800									
LQP11AR10G00	100	25				6.1		700						

■ TYPICAL ELECTRICAL CHARACTERISTICS

● Q-Frequency Characteristics

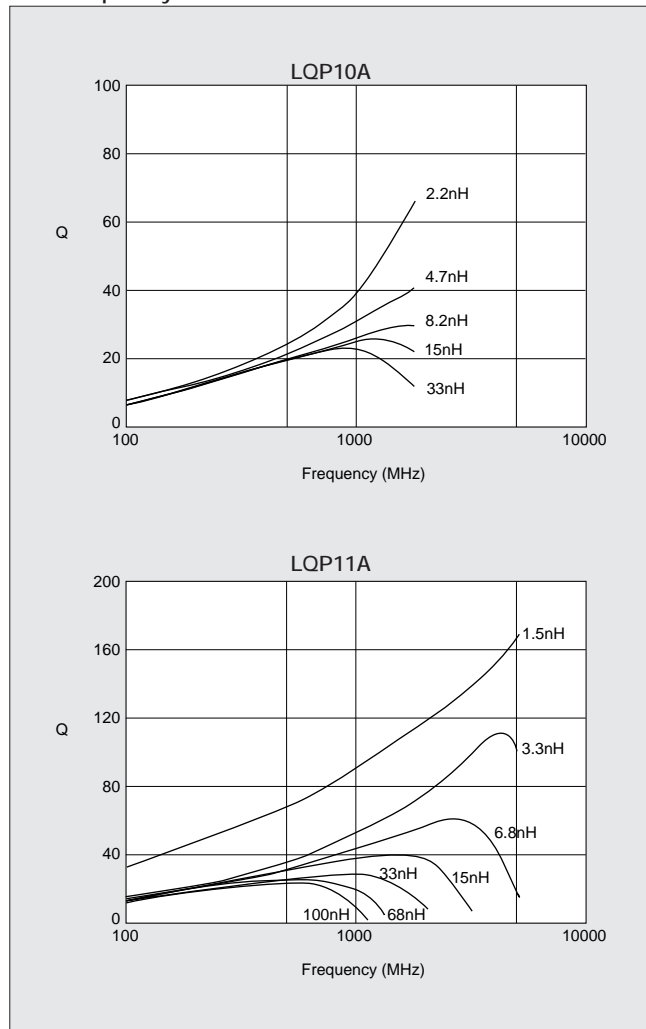

● Inductance - Frequency Characteristics

