

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

2 W

DC-12.4GHz


SMA

COAXIAL ATTENUATOR

Issue
28. jul. 93

Page
1 / 1

DRAWING

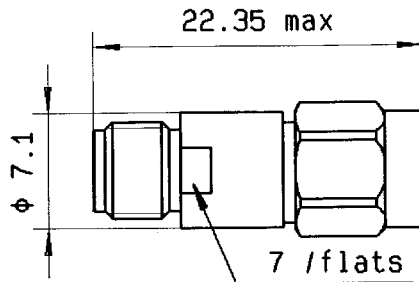

General tolerances: +/- 0.5 mm

R F CHARACTERISTICS

FREQUENCY RANGE : DC - 12.4 GHz
 IMPEDANCE : 50 Ohms
 ATTENUATION - NOMINAL : 3 dB

FREQUENCY	DC- 4 GHz	4 -12.4GHz
V.S.W.R	<= 1.15	<= 1.25
DEVIATION (dB)	+0.3 / -0.3	+0.3 / -0.3


TEMPERATURE SENSITIVITY : $4 \times 10^{-4} \frac{\text{dB}}{\text{dB} \times ^\circ\text{C}}$
 PEAK POWER at 25°C (1µs, 1%.) : 100 W
 AVERAGE POWER at 25°C : 2 W

MECHANICAL CHARACTERISTICS

CONNECTORS : SMA male/female per MIL-C 39012
 WEIGHT : < 5 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -55 , +125
 STORAGE TEMPERATURE RANGE (°C) : -55 , +125

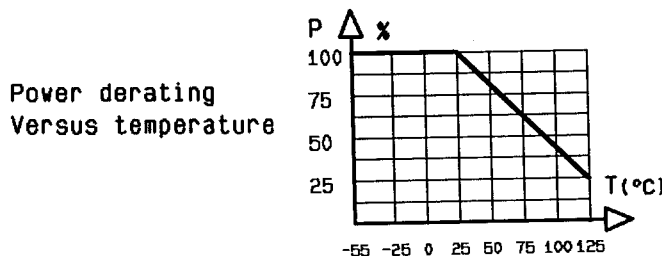

QUALITY : 93
 Dpt app. : S
 CREATION
 PEN : CAT
 EP :
 Nom : DP
 Date : 02.mar.89

28.jul.93
 ISSUE

New format

REVISIONS

VE
 NAME