

5

4

3

2

1

SPECIFICATIONS

ELECTRICAL

FREQUENCY RANGE _____ DC - 18 GHz

ATTENUATION ACCURACY

0 - 6 dB _____ ±0.30 dB
7 - 20 dB _____ ±0.50 dB
21 - 30 dB _____ ±0.75 dB

VSWR

DC - 4 GHz _____ 1.15:1 MAX
4 - 12.4 GHz _____ 1.25:1 MAX
12.4 - 18 GHz _____ 1.35:1 MAX

INPUT POWER

_____ 2 WATTS

DERATES LINEARLY FROM 100% @ +25°C TO 10% @ 125°C

PEAK POWER

_____ 500 WATTS

(5µSec PULSE WIDTH, 0.01% DUTY CYCLE)

IMPEDANCE

_____ 50 OHMS

OPERATING TEMP RANGE

_____ -65°C TO +125°C

MECHANICAL



CONNECTOR BODIES _____ PASSIVATED STAINLESS STEEL
CENTER CONDUCTORS _____ GOLD PLATED BERYLLIUM COPPER
INSULATORS _____ PTFE (TEFLON) IAW ASTM-D1710
RESISTIVE ELEMENT _____ THIN FILM HYBRID ON 99.6% ALUMINA SUBSTRATE

CONNECTOR INTERFACES IAW MIL-STD-348 & MIL-PRF-39012


MATERIALS, FINISHES AND ENVIROMENTAL CAPABILITIES DESIGNED TO MEET MIL-DTL-3933

MARKING

PART LOOKS LIKE PRODUCT IMAGE ABOVE.
PART MARKING ORIENTATION AND FORMAT AS SHOWN.
CHANGE X TO THE ONE DIGIT VALUE ON WORK ORDER.
REPLACE dB WITH APPROPRIATE TWO DIGIT dB VALUE.
MARKING TO BE AS LARGE AS POSSIBLE, CLEAR, READABLE.
YYWW EQUALS DATE CODE.

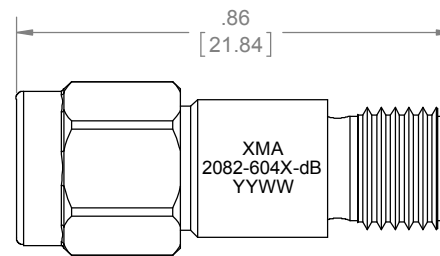

00 THRU 12 dB

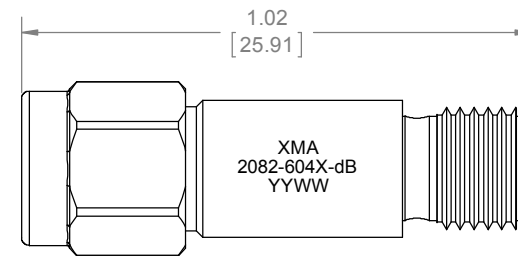

13 THRU 40 dB




Table with 4 columns: QTY., PART NUMBER, DESCRIPTION, ITEM NO.
Row 1: X, 2082-604X-dB, ATTENUATOR, SMA-m/f, DC-18 GHz, 2W
Row 2: 1, TA-2082-6000-dBAU, ASSEMBLY, ATTENUATOR, SMA-m/f, DC-18 GHz, 2W, UNMARKED, 1

Table with 2 columns: dB VALUES 2082:, 1dB STEPS, 18GHz 2082:
Row 1: -00/-03 = 0 THRU 3dB, -6040-00 THRU 03
Row 2: -04/-06 = 4 THRU 6dB, -6041-04 THRU 06
Row 3: -07/-10 = 7 THRU 10dB, -6042-07 THRU 10
Row 4: -11/-12 = 11 AND 12dB, -6043 AND 12
Row 5: -13/-20 = 13 THRU 20dB, -6043-13 THRU 20
Row 6: -25, -30, AND 40dB, 6044-25, -30, OR 40

DRAWING PRACTICES PER ANSI-Y-14.5 MIL-STD-100 & 1000
DIMENSIONS ARE IN INCHES AND APPLY BEFORE / AFTER PROCESSING
SURFACE ROUGHNESS 63 µINCHES
FINISH:
SEE NOTES
MATERIAL:
SEE NOTES
NOTE: THIS DRAWING INCORPORATES THIRD ANGLE PROJECTION.
INTERPRET IAW ANSI Y14.5-1982

UNLESS OTHERWISE SPECIFIED TOLERANCES IN:
DECIMALS INCH [MM]
.X" .05" [1.27]
.XX" .03" [.76]
.XXX" .010" [.25]
ANGLES ±0°30'
REMOVE ALL BURRS/SHARP W/ BREAK / R OF .003" TO .0005" UNLESS OTHERWISE NOTED DIAS CONCENTRIC <.003 T.I.R.
DO NOT SCALE PRINT

DRAWN DATE MCCORMICK 12/16/14
CHECKED DATE MCCORMICK 12/16/14
ENG. APPR. DATE T.KUHN 12/26/14
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XMA CORP. OR OMNI SPECTRA AND SHALL NOT BE REPRODUCED, COPIED NOR USED - IN WHOLE OR IN PART - AS A BASIS FOR THE MANUFACTURE OR SALE OF OTHER ITEMS WITHOUT THE EXPRESS WRITTEN PERMISSION OF XMA CORP.

XMA Omni Spectra logo
Phone: 603-222-2256 Fax: 603-222-2259
150 Dow Street, Manchester, NH 03101
TITLE: ATTENUATOR, SMA-m/f, DC-18GHz, 2W
SIZE B CAGE CODE 3HT76 DRAWING NUMBER 2082-604X-dB REV M
SCALE PLATED AREA SQ. IN SHEET 1 OF 1

5

4

3

2

1