RADIALL® Microwave components	TECHNICAL DATA SHEET	R413810117	
2 W DC-12.4GHz SMA COAXIAL ATTENUATOR		issue 28.jul.93	Page 1/1

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

DRAWING

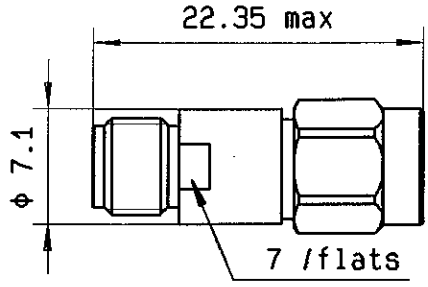

General tolerances: +/- 0.5 mm

R F CHARACTERISTICS

FREQUENCY RANGE : DC - 12.4 GHz
IMPEDANCE : 50 Ohms
ATTENUATION - NOMINAL : 10 dB

FREQUENCY	DC- 4 GHz	4 -12.4GHz
V.S.W.R	<= 1.15	<= 1.25
DEVIATION (dB)	+0.5 /-0.5	+0.5 /-0.5

TEMPERATURE SENSITIVITY : $4 * \frac{10^{-4}\ dB}{dB * {}^{\circ}C}$

PEAK POWER at 25°C (1µs,1%,) : 100 W
AVERAGE POWER at 25°C : 2 W

MECHANICAL CHARACTERISTICS

CONNECTORS : SMA male/female per MIL-C 39012
WEIGHT : < 5 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -55 , +125
STORAGE TEMPERATURE RANGE (°C) : -55 , +125

Power derating
Versus temperature

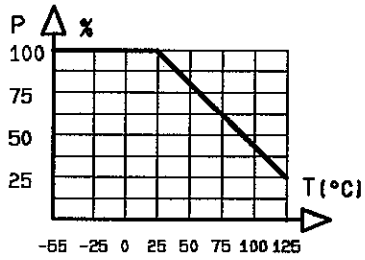

QUALITY R4 Dpt app. B			
CREATION PEN : CAT EP : -------- Nom : DP Date:02.mar.89	28.jul.93	New format	VE
	ISSUE	REVISIONS	NAME

RADIALL®
101. Philibert Hoffmann - Z.I Ouest - 93116 ROSNY/BOIS Cedex-FRANCE
Phone:33.1.49353535
Fax :33.1.48546363
Tvx RADIA 235220F

4112-9211