

DATASHEET



ELECTRICAL SPECIFICATIONS:


Frequency range	10 MHz - 18 GHz	
Impedance	50 Ω	
VSWR	1.30 (max.)	
Insertion loss	0.60 dB (max.)	
Voltage rating	50 V	P/N: DCB-NA50-18
	100 V	P/N: DCB-NA100-18
	250 V	P/N: DCB-NA250-18
Operating temp. range	-55 / +100 °C	
Connector type	N-type male – N-type female	

MATERIAL SPECIFICATIONS:

	Materials	Finishes
Body	Brass	Ternary alloy
Center contact	BeCu/Brass	Gold plating



Unit: mm

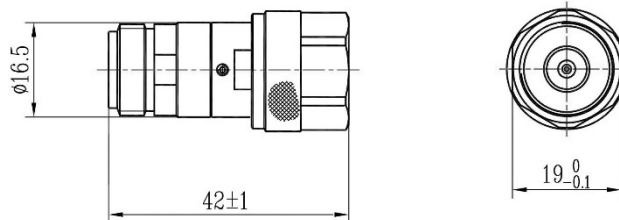

Typical performance graph

