

DATASHEET



ELECTRICAL SPECIFICATIONS:


Frequency range	10 MHz - 26.5 GHz	
Impedance	50 Ω	
VSWR	1.30 (max.)	
Insertion loss	0.60 dB (max.)	
Voltage rating	50 V	P/N: DCB-SA50-26
	100 V	P/N: DCB-SA100-26
	250 V	P/N: DCB-SA250-26
Operating temp. range	-55 / +100 °C	
Connector type	SMA male - SMA female	

MATERIAL SPECIFICATIONS:


	Materials	Finishes
Body	Stainless steel	passivated
Center contact	BeCu/Brass	Gold plating



Unit: mm

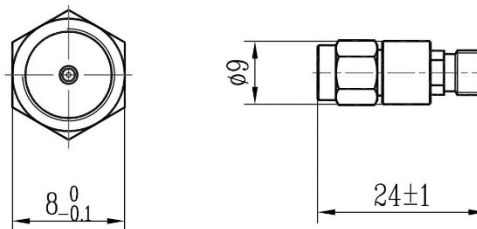

Typical performance graph

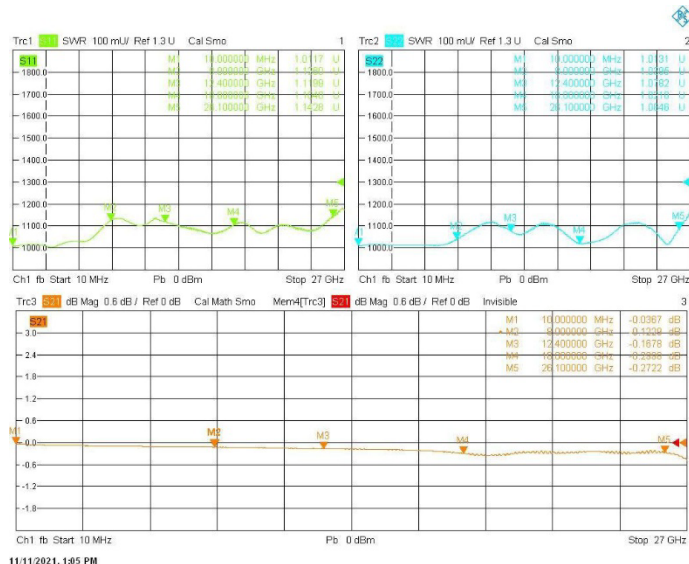

11/11/2021, 1:05 PM