




Part Number: **T50-17**

Revision 20190524 - Generated 2019-May-30

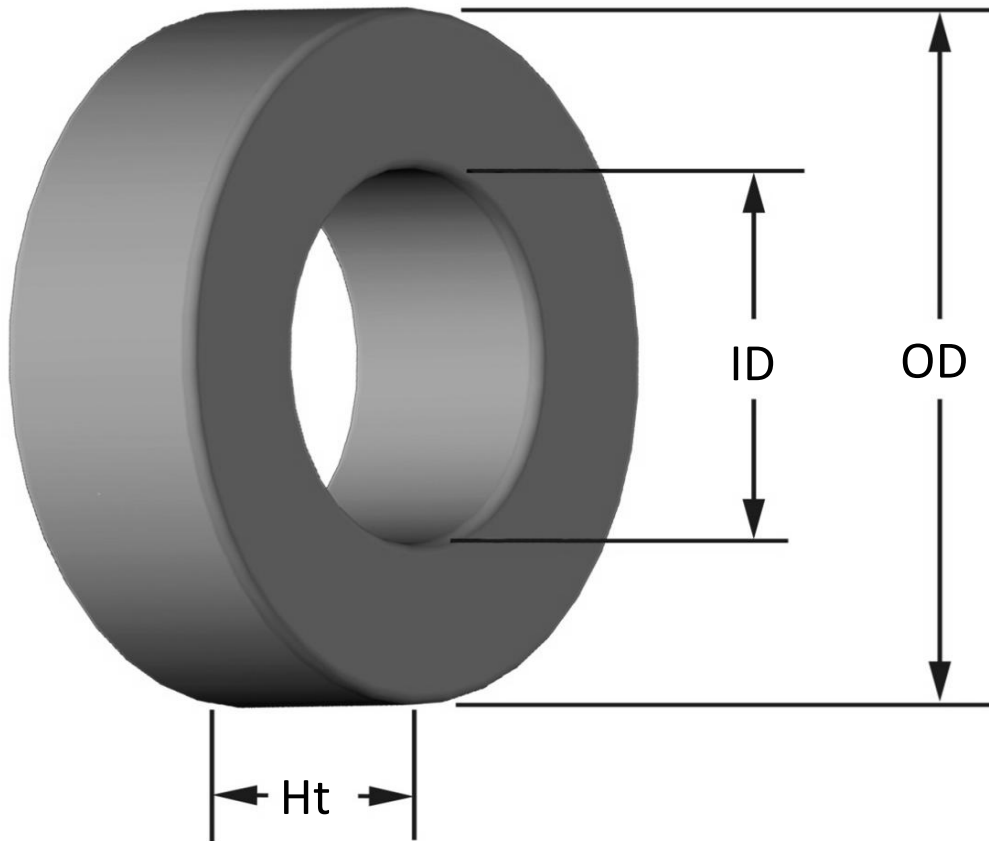

OD	(nom. - bare core) (max. - after coating)	12.70 mm 13.21 mm	0.500 in 0.520 in
ID	(nom. - bare core) (min. - after coating)	7.70 mm 7.19 mm	0.303 in 0.283 in
Ht	(nom. - bare core) (max. - after coating)	4.83 mm 5.33 mm	0.190 in 0.210 in
Mass	(approximate)	1.7 grams	
Magnetic Dimensions	A _e - Eff. Mag. Cross Section	0.112 cm ²	
	L _e - Eff. Mag. Path Length	3.19 cm	
	V _e - Eff. Core Volume	0.358 cm ³	
	WA - Min. Eff. Window Area	0.406 cm ²	
	sa - Surface Area	6.44 cm ²	
Inductance	μ _i (reference)	4	
	A _L value (nominal)	1.8 nH/N ²	
	Test Winding	N=100, #32 AWG	
	Frequency	1 MHz	
	Voltage on Agilent 4284A	1.0 V	
Core Loss & Q	A _L tolerance	±5%	
	Core Loss(mW/cm ³)=	$\frac{f}{\frac{a}{Bpk^3} + \frac{b}{Bpk^{2.3}} + \frac{c}{Bpk^{1.65}}} + d \cdot Bpk^2 \cdot f^2$	
	where B _{pk} expressed in gauss, f expressed in hertz, and:	a=4.00E+09, b=3.00E+08, c=2.70E+06, d=4.40E-16	
	Q test winding	N=15, #20 AWG	
	Q frequency	25 MHz	
DC Saturation	Q min on HP4342A	159	
	%μ _i =	$\frac{1}{a + b \cdot H^c} + d$	
	where H expressed in oersteds, and:	a=1.00E-02, b=1.34E-08, c=1.55, d=0.00	
	H _{DC}	200 Oe	
	Percent Initial Perm(nom.)	99.5%	
Coating/Pkg	Percent Initial Perm(min.)	99.4%	
	Coating Type:	Blue/Yellow Epoxy Paint	
	Voltage Breakdown (min.)	500 Vrms, 60Hz	
	Limit	3 mA, 5 s	
Winding Table	Package Quantity	6,000 Pcs/Box	
	Wire Size	AWG	16 18 20 22 24 26 28 30 32 34 36
Single Layer	mm	1.250 1.000 0.800 0.630 0.500 0.400 0.315 0.250 0.200 0.160 0.125	
	Turns	12 15 20 25 32 41 51 64 81 101 127	
Full Winding	Rdc(Ω)	3.2 m 6.4 m 13.5 m 26.8 m 54.6 m 111.3 m 220.2 m 439.4 m 884.5 m 1.8 3.5	
	Turns	12 19 29 45 70 108 168 259 401 621 962	
Full Winding	Rdc(Ω)	3.2 m 8.1 m 19.6 m 48.3 m 119.5 m 293.2 m 725.3 m 1.8 4.4 10.8 26.6	

